



The Value of Experience

Combining precision and quality in a cable system is both an art and a science. Getting it right requires knowledge and experience. Ronstan is the world leader in the supply of tensile cable architecture. Fifty years of continual research and development means our cable systems come to you with a pedigree that is second to none.

Our facilities span Australia, USA, Denmark, New Zealand and the United Kingdom, and we bring our expertise to 55 countries.

Applications for Ronstan Balustrade and Railing Cable Systems:

- Outdoor decking
- · Balconies, mezzanines and landings
- Interior staircases
- Railing and barriers
- Retail and commercial settings
- · Public spaces

Selecting your system

Ronstan makes it easy to choose the right balustrade and railing cable system. Using the catalogue you can:

- 1. Determine your needs for cable construction, diameter and orientation
- 2. Select your terminations and cable systems
- 3. Choose the fixing methods and details.

The Total Solution

For complex jobs and needs Ronstan also offers:

- Design support
- · Cable and fitting selection
- · Cost estimation and budgeting
- Site supervision and installation



balustrade & railing Cables give balustrades and railings a sense of elegance, space and style. With careful planning and design, they have the ability to totally transform the look. Their clean and simple lines create a sleek and modern aesthetic, while offering uninterrupted views. They're contemporary, low-maintenance and surprisingly easy and fast to install. Ronstan has been setting the standard for cable applications in balustrades and railings since 1988. Making it easier for you Our new balustrade and railing catalogue was designed to make life simpler for you. The process of researching and selecting the right system has been streamlined. We have five new complete cable systems, each one with an individual part number. This means no more time-wasting and frustration selecting individual components. All the information you need is logically laid out, with clearly displayed diagrams and details. It's the definitive resource for balustrade and railing cables. **Services** Ronstan offers its wealth of knowledge and expertise in the many applications of cable systems. Our services include; design engineering, project management, and installation. ABS1 ABS2 ABS3 ABS4 ABS5




Vertical Balustrades, Railings and Barriers

Simple and elegant aesthetics meets the ultimate in functionality. The smart use of cables lets you express individuality, flair and sense of style with minimal fuss and stress.

Cables allow for creative freedom, their unobtrusive lines giving designers the ability to be flexible and creative. When cleverly used, they can become the ultimate non-climbable barrier.

We understand cables and have services available to help you realise your concept. Our support team have more than two decades of experience in balustrade and railing cables, so we know exactly what to do and how to do it.

Project: Best House
Location: Melbourne, Australi
Architect: Atelier Wagner
Gable: Ronstan
Photo: Shannon McGrath

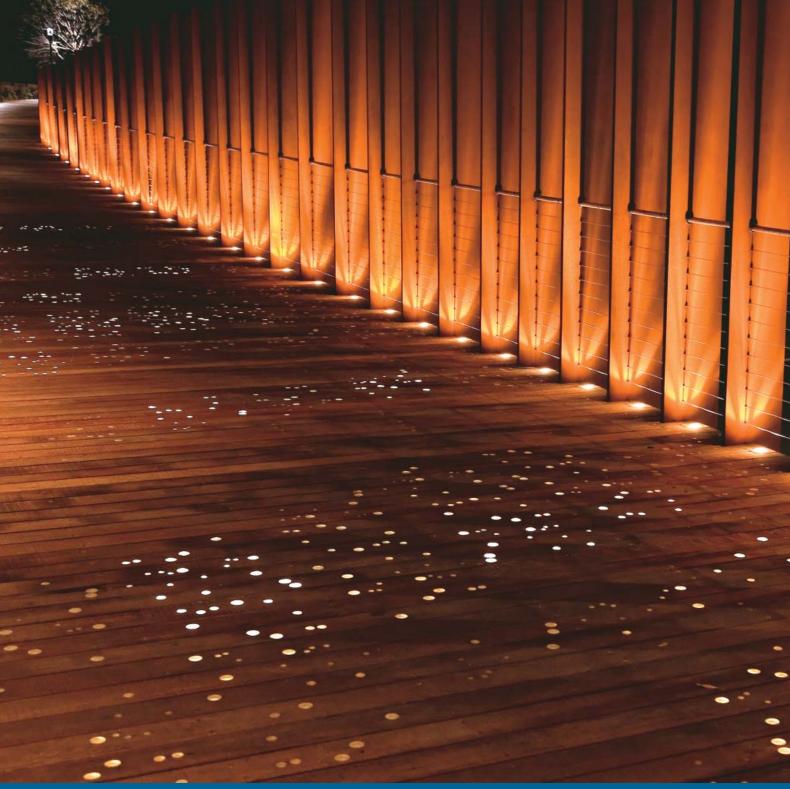

Public Spaces

Ronstan cable systems are the only choice for high profile and public spaces. These areas need systems that combine superb aesthetics with durability and performance. Tamper resistant and fitted with antitheft mechanisms, they're the only cable systems you can trust.

We know that cables must perform at their best on two levels: structural integrity and aesthetics. That's why Ronstan designs them with both elements at the fore- neither at the expense of the other.

Project: Sydney University Footbridg Location: Sydney, Australia Architect: Taylor Cullity Lethean Cable: Ronstan Martin van der Wal



Domestic

Ronstan's cable systems allow for a beautiful blend of functionality with minimal structure. The design of a home can shine with cables' clean lines and uninterrupted views. This allows for a distinctive and stylish feel, which doesn't compromise on security or strength.

Every house is different, and that's why the flexibility of cable systems is perfect. They can be applied with ease to the most complex and demanding architecture. Ronstan's wide range enables you to create your own solution.

Project: Walsh Bay Location: Sydney, Australia Architect: Mirvac Cable: Ronstan Photo: Mark Donaldson



Mesh

To make a bold architectural statement, it's often required to apply the philosophy that less is more. Flexible stainless steel wire mesh delivers the unique look that you are after, without interrupting the view.

Ronstan's X-TEND® mesh is flexible, corrosion resistant and aesthetically pleasing. It's completely tailor-made to fit the application and is the clear choice around the world for innovative structures. Specifiers and contractors swear by it because they trust Ronstan's experience and know-how.

Project: Mercedes Benz Museum Location: Bad Cannstatt, Germany Architect: UNstudio van Berkel & Bos, Amsterda Callstabl

Photo: Hans-Georg, Hennef/Sieg


Key Design Considerations

Design Steps

Balustrades and railings perform an integral function within the building. Not only do they define space, but they provide an essential barrier preventing falls from height.

Stainless steel cable provides an aesthetically pleasing, low maintenance and long life alternative to traditional balustrade and railing infill materials. Unlike some alternatives, in most environments quality stainless steel cables will maintain their structural integrity for the life of the structure.

Key considerations for a successful application are as follows:

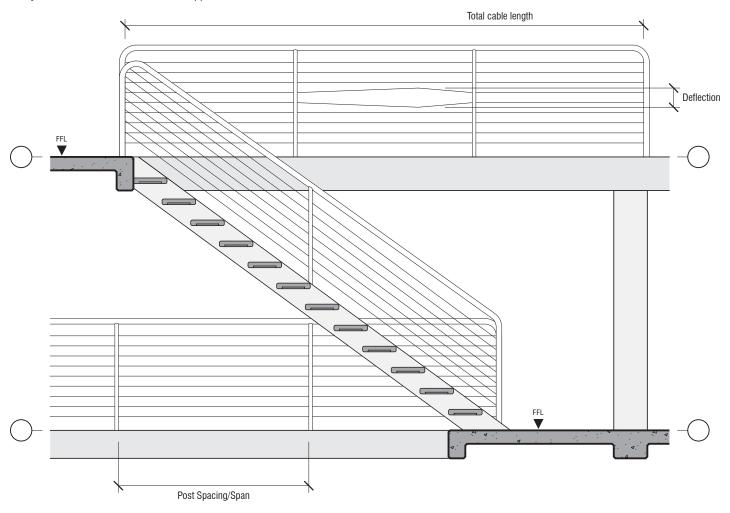

Vertical or Horizontal Cable Applications

This primary consideration is driven by a combination of aesthetics and building regulations. Some codes prohibit the application of horizontal cables where a finished floor height is a specified distance above ground. We recommend you review the regulations in your region or country before making your selection.

Post Design

Aesthetics and structural integrity are the driving considerations when selecting posts.

End posts must be adequately designed to cope with the loads necessary to resist cable deflection when forces are applied. This involves a careful selection of materials and in some instances requires the involvement of your project consultants.

Lighter construction intermediate posts can be located to hold horizontal cables in position and limit deflection by minimising the free span, rather than increasing tension in the cables and/or upsizing the end posts.

Post Spacings, Span and Cable Tension

The span or distance between posts on a balustrade/railing has a direct relationship to deflection. With increased spacings higher tension needs to be applied to resist deflection. Often keeping your posts closer together to limit deflection is more economical and aesthetically pleasing than increasing the strength of end posts to cope with higher tensile loads.

Some building codes now require cables to be installed in accordance with specific tension/spacing and maximum allowable deflection requirements.

4

Cable Diameter, Construction and Grade

Along with aesthetics, cable stretch is a key consideration when selecting a diameter. As the diameter increases, so does the cable's resistance to elongation and deflection at a given load.

Generally, 3mm or 1/8" cables provide an optimal combination of strength, stretch, resistance to defection, aesthetics and economy. In some countries, such as the USA, 5mm or 3/16" cable diameter is preferable for code compliance.

Cable construction refers to the number and lay of individual wires within the cable. Two constructions are specified for Ronstan balustrade and railing applications.



1x19 offers the lowest stretch over long distances. It has smooth outer strand and a technical appearance.



7x7 is a more flexible cable with a textured or braided appearance. It is superior for applications with multiple changes of cable direction, but is limited to shorter distances by its higher stretch.

Grade 316 is widely considered the default stainless steel grade for balustrade cables. It offers the best marriage of corrosion resistance and strength which is critical to aesthetics and structural performance over time.

5

Cable Spacing

Understanding that cables deflect, cable spacing has a direct impact on the ability of infill cables to restrict the passage of minimum sized objects through the balustrade/railing as required by local authorities and codes. Typically, spacings of 80-100mm (3-4") are used, however, local requirements vary considerably and we recommend consultation with your local building authority.

A good practise is to design cable spacings closer than the local code requires allowing for some cable deflection. We commonly see cable spacings 25mm (1") closer than mandated by regulatory codes.

6

Cable Lengths

Often cables are unnecessarily terminated at corners. A well designed cable balustrade or railing is one where cable termination points are carefully selected to maximise the cable length without over stressing the termination post. While it is true that cables can break down if they are bent too harshly, with careful detailing cables can be carried around corners with minimal loss of tension from friction.

As lengths increase greater tension is required to resist deflection resulting in greater force being applied to the end posts. This needs to be considered in end post design.

Ronstan fittings offer sufficient adjustment to achieve tension to the nominated lengths.

7

Deflection

Stainless steel cables are high tensile tendons used to transfer load between two points. If a load is applied at any point along the cable it will deflect. In the case of balustrade or railing cables, deflection becomes an issue of safety allowing the passage of items through the balustrade or railing. Deflection bears close relationship to cable diameter, cable construction, cable spacing, post spacing/span, cable tension and cable length.

8

Connections, Fittings and Material



Stainless Steel - Ronstan understand the benefits afforded by stainless steel cable balustrades and railing. Clean crisp aesthetics, low maintenance and structural integrity can only be guaranteed through the use of quality material and known quality assured manufacture.

Ronstan cable systems are manufactured to ISO9001-2000, they are load rated and designed specifically for balustrade and railing applications. Our material is fully traceable, our systems simple and connections reliable.

Ronstan manufactured cable systems are denoted by the SS code.

Ronstan connectors can be used on either metal or timber posts. Our ABS systems can handle any detail situation with the use of our specialist components located in the components section.



The 'commodity' grade fittings located at the rear of the components section are commonly used for budget applications where price is the driving consideration rather than quality or performance. The commodity grade range offers an economic non-rated solution with fittings subject to dimensional changes without notice.

Commodity grade fittings are denoted by the (16) code.

SS System Options


ABS1 - Threaded Terminal Adjusters Type A SS Type B SS \mathbb{D} **Description Cable Diameters** Lengths/Span A simple, clean and economical cable 3mm 1/8" Typically suits straight runs. 4mm 5/32" ABS1 Type A - 10m (32') maximum length. 5mm 3/16" ABS1 Type B - 5m (16') maximum length. 1/4"


Specific Features

- An in-line system of minimal visual impact with no bulky turnbuckles to impede views.
- Neat and simple architectural connections for the ultimate clean look.
- Easy tensioning from the outside of the post allows fast installation and minimal time on site.
- The system is perfect for both vertical and horizontal configurations.
- Quality Grade 316 stainless steel construction suitable for harsh environments and long service life.

Applications

- · Perfect for any situation where the goal is reduced visual impact.
- Ideal for domestic, commercial and public applications where access to the outside of the end posts is possible.
- · Suitable for use with timber or metal uprights.
- Short runs in vertical or horizontal applications.
- · Stair situations using angled washers.

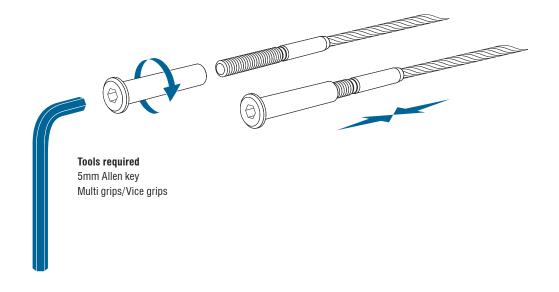

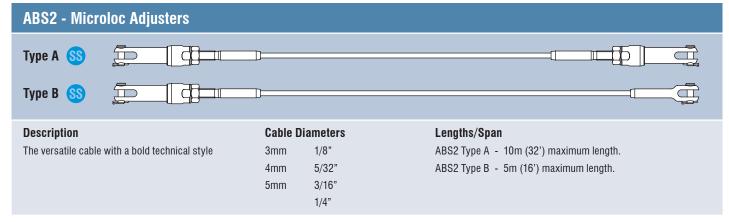


Specific Features

- ABS2 utilizes the unique Microloc adjuster, a bold contemporary interpretation of the dependable and reliable traditional turnbuckle.
- The articulated fork end and wide range of mating connections are perfect for both stair and horizontal balustrade/railing applications.
- Versatile connection options to suit timber or metal posts.
- Simply tensioned with a standard spanner or wrench no special tools.
- Unique tamper resistant "press" pin option is available to minimise theft or damage. (below)
- Quality Grade 316 stainless steel construction for harsh environments and long service life.

Applications

- Suitable for horizontal, vertical and stair situations.
- Ideal for domestic and commercial applications.
- Where architectural aesthetics demand a cable with bold technical fittings.

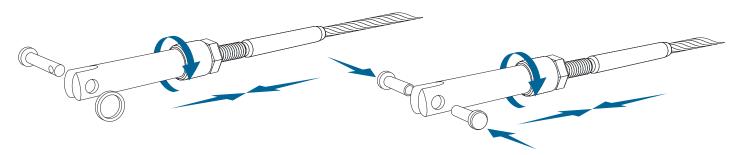

Standard attachment

Tools required

Spanner/wrench set Multi grips/Vice grips

Tamper resistant press pin

Tools required

Spanner/wrench set Multi grips/Vice grips

SS System Options


ABS3 - Tamper Resistant Adjusters a) **Description Cable Diameters** Lengths/Span 3mm 1/8" Typically suits straight runs of 20m (65'). Tamper resistant cable for public spaces 4mm 5/32" 3/16" 5mm 1/4"

Specific Features

- Incorporates the World's only true theft resistant turnbuckle.
- Unique tamper resistant "press" pins with minimalist architectural heads lock together to permanently secure the cable to the end connection.
- · Fittings and lock nuts devoid of spanner flats cannot be undone with standard tools.
- Easily tensioned with unique "C" spanners the average vandal doesn't carry these in his back pocket!
- Sleek styling with aesthetics uncompromised by the security features and mechanical robustness.
- Quality Grade 316 stainless steel construction for harsh environments and long service life.
- · Greater adjustment for longer runs and economy.
- · Versatile connection options to suit timber or metal posts.

Applications

- · Ideal for urban environments and public spaces or anywhere theft or tampering may be a concern.
- · Plaza's and squares.
- · Beach and river front.
- · Pedestrian walkways & bridges.
- Suitable for horizontal applications with longer runs.

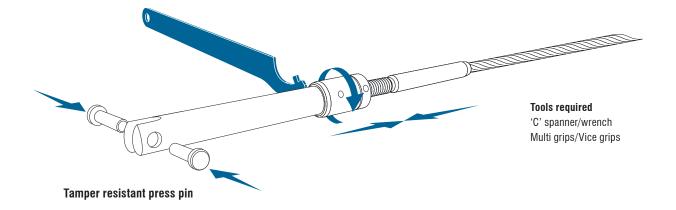

ABS4 - In-line Adjusters **Description Cable Diameters** Lengths/Span 3mm Typically suits straight runs of 8m (26') The ultimate in-line cable with no visible threads 4mm 5mm

Specific Features


- · Sleek styling ensures clean, crisp in-line details.
- · No visible threads for a smooth finish.
- Unique swivelling tensioner adjustable from between the uprights.
- · Simply tensioned from one end via a discrete spanner flat for fast installation and minimal time on site.


6mm

• Available only in 7x7 cable construction for that braided cable look.

Applications

- · Highly visible residential and commercial architectural applications.
- Ideal for horizontal and stair situations.
- · Where a premium in-line cable needs to be noticed.

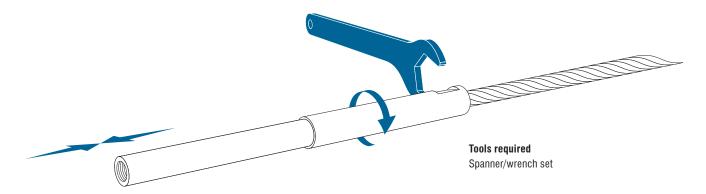

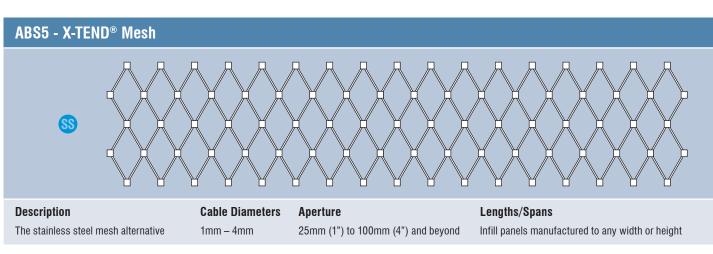

Specific Features

- A uniquely different approach to the stainless cable balustrade or railing for that statement project.
- · The elastic mesh finds its own way around simple and complex geometric shapes to achieve uncompromised aesthetic form.
- · A light and airy feel to suit any minimalist environment.
- · High transparency for reduced visual impact on any view or landscape.
- · Fully load rated for superior performance as a barrier or in a security application.
- · Suits rigid frame or cable perimeter mounting.
- · Allows the expression of your individuality.
- · Quality Grade 316 stainless steel construction for harsh environments and long service life.

Applications

- · When a high visual and aesthetic impact is required.
- · For applications where the unique attributes of stainless steel balustrade are sought in a totally different form.
- · Ideal for residential and commercial applications.
- Suitable for both horizontal and stair applications.
- · Floor to ceiling and in-fill partitioning.
- · Offers great aesthetic benefits when used for security screening.

Threaded Terminal Adjusters

ABS1


Simple, clean lines make ABS1 the industry standard when it is crucial to minimise visual impact. Neat and compact, their Allen key heads and matching end stops rotate smoothly to allow for easy tensioning of vertical and horizontal cable applications.

ABS1 - The minimalist in-line cable.



ABS1 - Systems

Type A



S Type A - Metric Cable

PRODUCT No.	CABLE Ø mm	CABLE Construction	BR kN	EAKING I	LOAD Ib
ABS1A-19M03	3.0	1x19	5.3	544	1200
ABS1A-19M04	4.0	1x19	9.4	960	2116
ABS1A-19M05	5.0	1x19	12.7	1300	2866


PRODUCT	CABLE Ø	CABLE	BR	EAKING I	LOAD
No.	mm	CONSTRUCTION	kN	kg	lb
ABS1A-77M03	3.0	7x7	5.3	544	1200
ABS1A-77M04	4.0	7x7	9.4	960	2116
ABS1A-77M05	5.0	7x7	12.7	1300	2866

S Type A - Imperial Cable - ex. North America

PRODUCT No.	CABLE Ø in.	CABLE Construction	BR kN	EAKING kg	LOAD Ib
ABS1A-19-04	1/8"	1x19	6.3	646	1424
ABS1A-19-05	5/32"	1x19	9.4	960	2116
ABS1A-19-06	3/16"	1x19	12.7	1300	2866
ABS1A-19-08	1/4"	1x19	12.7	1300	2866

PRODUCT	CABLE Ø	CABLE	BR	EAKING I	LOAD
No.	in.	CONSTRUCTION	kN	kg	lb
ABS1A-77-04	1/8"	7x7	6.3	646	1424
ABS1A-77-05	5/32"	7x7	9.4	960	2116
ABS1A-77-06	3/16"	7x7	12.7	1300	2866
ABS1A-77-08	1/4"	7x7	12.7	1300	2866

Type B



SS Type B - Metric Cable

PRODUCT	CABLE Ø	CABLE	BR	EAKING	LOAD
No.	mm	CONSTRUCTION	kN	kg	lb
ABS1B-19M03	3.0	1x19	5.3	544	1200
ABS1B-19M04	4.0	1x19	9.4	960	2116
ABS1B-19M05	5.0	1x19	12.7	1300	2866

PRODUCT	CABLE Ø	CABLE	BR	EAKING I	LOAD
No.	mm	CONSTRUCTION	kN	kg	lb
ABS1B-77M03	3.0	7x7	5.3	544	1200
ABS1B-77M04	4.0	7x7	9.4	960	2116
ABS1B-77M05	5.0	7x7	12.7	1300	2866

SS Type B - Imperial Cable - ex. North America

PRODUCT	CABLE Ø	CABLE	BR	EAKING	LOAD
No.	in.	CONSTRUCTION	kN	kg	lb
ABS1B-19-04	1/8"	1x19	6.3	646	1424
ABS1B-19-05	5/32"	1x19	9.4	960	2116
ABS1B-19-06	3/16"	1x19	12.7	1300	2866

PRODUCT	CABLE Ø	CABLE	BR	EAKING I	LOAD	
No.	in.	CONSTRUCTION	kN	kg	lb	
ABS1B-77-04	1/8"	7x7	6.3	646	1424	
ABS1B-77-05	5/32"	7x7	9.4	960	2116	
ABS1B-77-06	3/16"	7x7	12.7	1300	2866	

(RONSTAN)



SS ABS1 - Threaded Terminal Adjusters

ABS1 - Component Dimensions

SS Adjuster Body

Dimensions in Metric

THREAD Type	A	В	С	D	E	WEIGHT
	mm	mm	mm	mm	mm	g
1/4" UNF	13.0	5.0	34.0	8.0	40.0	7
					Dimension	s in Imperial



					211110110110110	
	in.	in.	in.	in.	in.	0Z
1/4" UNF	0.512	0.197	1.339	0.315	1.575	0.2


SS Threaded Swage Terminals

Dimensions in Metric

CABI	LE Ø	THREAD Type	Α	В	С	WEIGHT
mm	in.		mm	mm	mm	g
3.0	1/8"	1/4" UNF	26.0	77.0	46.0	13
4.0	5/32"	1/4" UNF	28.0	90.0	46.0	18
5.0	3/16"	1/4" UNF	32.0	93.0	46.0	25
-	1/4"	1/4" UNF	42.0	96.0	46.0	40

Dim	ensior	ne in	Imne	rial
יווווע	CIISIUI	19 111	IIIIhe	Hai


					Difficitoto in imperiar		
			in.	in.	in.	0Z	
3.0	1/8"	1/4" UNF	1.024	3.031	1.811	0.5	
4.0	5/32"	1/4" UNF	1.102	3.543	1.811	0.6	
5.0	3/16"	1/4" UNF	1.260	3.661	1.811	0.9	
-	1/4"	1/4" UNF	1.654	3.780	1.811	1.4	




SS Swage Stops


Dimensions in Metric

CABLE Ø		A	В	C	D	E	WEIGHT
mm	in.	mm	mm	mm	mm	mm	g
3.0	1/8"	13.0	8.0	26.0	6.4	31.0	8
4.0	5/32"	13.0	8.0	28.0	6.4	35.0	8
5.0	3/16"	13.0	8.0	32.0	7.6	42.0	14
						Dimensions	s in Imperial
		in.	in.	in.	in.	in.	0Z
3.0	1/8"	0.512	0.315	1.024	0.252	1.220	0.3
4.0	5/32"	0.512	0.315	1.102	0.252	1.378	0.3
5.0	3/16"	0.512	0.315	1.260	0.299	1.634	0.5



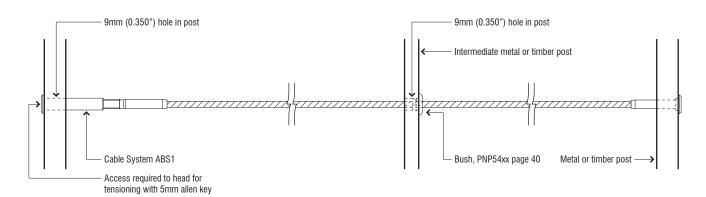



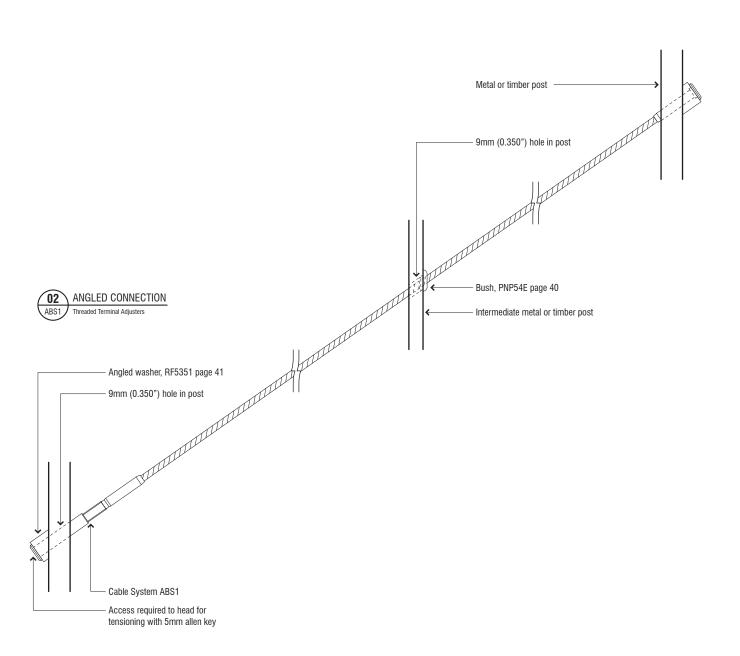

Microloc Adjusters

ABS2

For a modern architectural twist on traditional end fittings. The unique Microloc turnbuckle has a wide range of connecting hardware and the option of tamper-resistant pins on the articulating fork ends. Simple to adjust, they are perfectly suited to horizontal and stairway applications in both commercial and domestic settings.

ABS2 - Versatility with a bold technical style.



ABS2 - Systems

Type A



Type A - Metric Cable

PRODUCT No.	CABLE Ø mm	CABLE Construction	BRE kn	AKING I	LOAD Ib	PROD No.
ABS2A-19M03	3.0	1x19	5.3	540	1191	ABS2
ABS2A-19M04	4.0	1x19	7.8	800	1760	ABS2
ABS2A-19M05	5.0	1x19	7.8	800	1760	ABS2


PRODUCT	RODUCT CABLE Ø CABLE BREAKING		EAKING I	G LOAD	
No.	mm	CONSTRUCTION	kN	kg	lb
ABS2A-77M03	3.0	7x7	5.3	540	1191
ABS2A-77M04	4.0	7x7	7.8	800	1760
ABS2A-77M05	5.0	7x7	7.8	800	1760

S Type A - Imperial Cable - ex. North America

PRODUCT No.	CABLE Ø in.	CABLE CONSTRUCTION	BRE kn	AKING I	LOAD Ib
ABS2A-19-04	1/8"	1x19	5.3	540	1191
ABS2A-19-05	5/32"	1x19	7.8	800	1760
ABS2A-19-06	3/16"	1x19	7.8	800	1760
ABS2A-19-08	1/4"	1x19	7.8	800	1760

PRODUCT	T CABLE Ø CABLE I		BRE	BREAKING LOAD		
No.	in.	CONSTRUCTION	kN	kg	lb	
ABS2A-77-04	1/8"	7x7	5.3	540	1191	
ABS2A-77-05	5/32"	7x7	7.8	800	1760	
ABS2A-77-06	3/16"	7x7	7.8	800	1760	
ABS2A-77-08	1/4"	7x7	7.8	800	1760	

Type B



😘 Type B - Metric Cable

PRODUCT	CABLE Ø	CABLE	BRE	AKING I	LOAD
No.	mm	CONSTRUCTION	kN	kg	lb
ABS2B-19M03	3.0	1x19	5.3	540	1191
ABS2B-19M04	4.0	1x19	7.8	800	1760
ABS2B-19M05	5.0	1x19	7.8	800	1760

PRODUCT	CABLE Ø	CABLE	BREAKING LOAD		
No.	mm	CONSTRUCTION	kN	kg	lb
ABS2B-77M03	3.0	7x7	3.4	408	899
ABS2B-77M04	4.0	7x7	7.8	800	1760
ABS2B-77M05	5.0	7x7	7.8	800	1760

S Type B - Imperial Cable - ex. North America

PRODUCT	CABLE Ø	CABLE	BRE	EAKING I	LOAD
No.	in.	CONSTRUCTION	kN	kg	lb
ABS2B-19-04	1/8"	1x19	5.3	540	1191
ABS2B-19-05	5/32"	1x19	7.8	800	1760
ABS2B-19-06	3/16"	1x19	7.8	800	1760

PRODUCT	CABLE Ø	CABLE	BRE	EAKING I	_OAD	
No.	in.	CONSTRUCTION	kN	kg	lb	
ABS2B-77-04	1/8"	7x7	3.4	408	899	
ABS2B-77-05	5/32"	7x7	7.8	800	1760	
ABS2B-77-06	3/16"	7x7	7.8	800	1760	

^{*} Anti-theft option available - Suffix P after part number. eg. ABS2A-19M03P

^{*} Anti-theft option available - Suffix P after part number. eg. ABS2A-19M03P

^{*} Anti-theft option available - Suffix P after part number. eg. ABS2B-19M03P

^{*} Anti-theft option available - Suffix P after part number. eg. ABS2B-19M03P

2.047



SS ABS2 - Microloc Adjusters

0.236

ABS2 - Component Dimensions

SS Microloc Body

1/4" UNF


Dimensions in Metric

0.197

THREAD Type	А	В	С	D	E	WEIGHT	
	mm	mm	mm	mm	mm	g	
1/4" UNF	6.0	52.0	7.5	4.8	5.0	35	
				Dimensions in Imperial			
	in.	in.	in.	in.	in.	OZ	

0.295

0.188



SS Threaded Swage Terminals


Dimensions in Metric

1.2

CABLE Ø		THREAD Type	A	В	С	WEIGHT
mm	in.		mm	mm	mm	g
3.0	1/8"	1/4" UNF	26.0	77.0	46.0	13
4.0	5/32"	1/4" UNF	28.0	90.0	46.0	18
5.0	3/16"	1/4" UNF	32.0	93.0	46.0	25
-	1/4"	1/4" UNF	42.0	96.0	46.0	40

_									
ш	im	ens	inr	10	in	Im			
u		GIIO	IUI	lo.			ИG	Hai	


			in.	in.	in.	0Z
3.0	1/8"	1/4" UNF	1.024	3.031	1.811	0.5
4.0	5/32"	1/4" UNF	1.102	3.543	1.811	0.6
5.0	3/16"	1/4" UNF	1.260	3.661	1.811	0.9
-	1/4"	1/4" UNF	1.654	3.780	1.811	1.4



Swage Forks


Dimensions in Metric

CAB	LE Ø	PIN Ø	A	В	C	D	E	WEIGHT
mm	in.	mm	mm	mm	mm	mm	mm	g
3.0	1/8"	4.8	43.0	17.0	6.0	4.8	7.5	14
4.0	5/32"	4.8	46.0	17.0	6.0	4.8	7.5	17
5.0	3/16"	4.8	49.0	17.0	6.0	4.8	7.5	18



	ions		

		in.	in.	in.	in.	in.	in.	0Z
3.0	1/8"	0.188	1.693	0.669	0.236	0.188	0.295	0.5
4.0	5/32"	0.188	1.811	0.669	0.236	0.188	0.295	0.6
5.0	3/16"	0.188	1.929	0.669	0.236	0.188	0.295	0.6

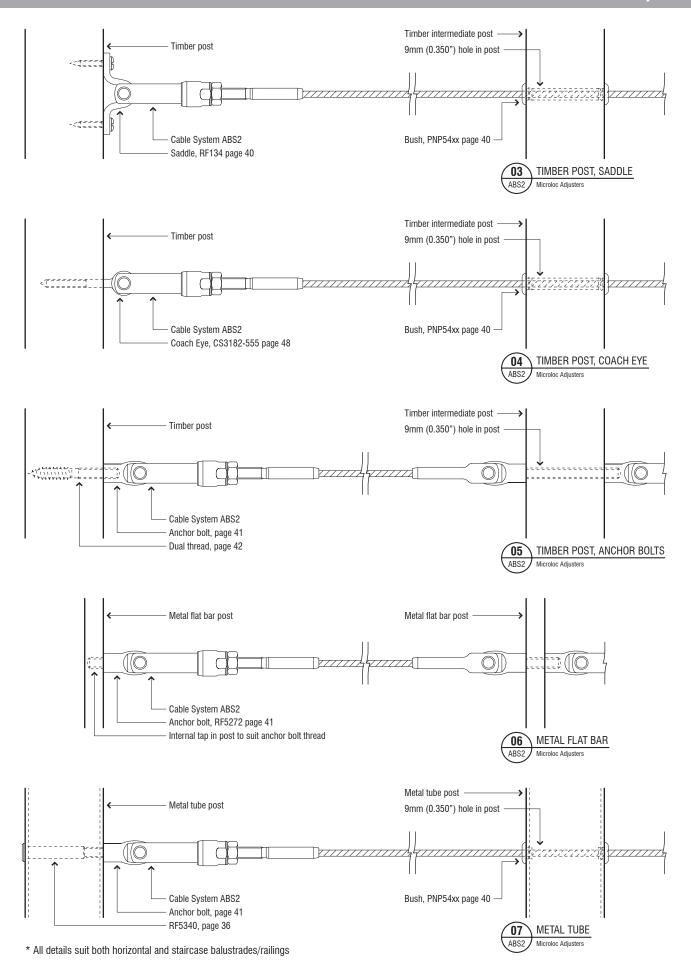


Tamper Resistant Adjusters


ABS3

Designed for urban developments, ABS3 is the world's only tamper resistant cable system. This feature, coupled with its sleek design and durability, make it the first choice for use in public spaces. Its versatility, secure end connections and ability to withstand harsh environments make it perfect for beach and river front areas, walkways and plazas.

ABS3 - The theft resistant cable.

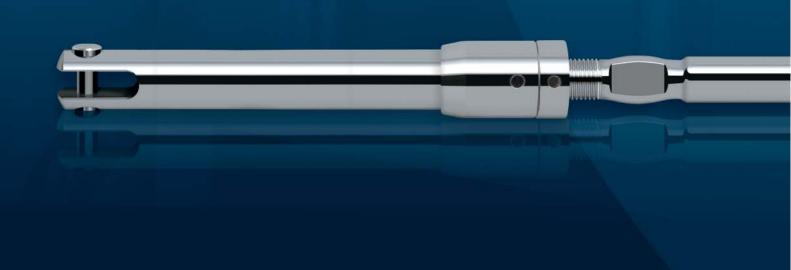

ABS3 - Systems



SS Metric Cable

PRODUCT No.	CABLE Ø mm	CABLE Construction	BRI kn	EAKING kg	LOAD lb
ABS3-19M03	3.0	1x19	5.3	540	1191
ABS3-19M04	4.0	1x19	7.8	800	1760
ABS3-19M05	5.0	1x19	7.8	800	1760

PRODUCT	CABLE Ø	CABLE		AKING I	
No.	mm	CONSTRUCTION	kN	kg	lb
ABS3-77M03	3.0	7x7	5.3	544	1200
ABS3-77M04	4.0	7x7	7.8	800	1760
ABS3-77M05	5.0	7x7	7.8	800	1760

S Imperial Cable - ex. North America

PRODUCT CABLE Ø		CABLE	BREAKING LOAD			
No.	in.	CONSTRUCTION	kN	kg	lb	
ABS3-19-04	1/8"	1x19	6.3	646	1424	
ABS3-19-05	5/32"	1x19	7.8	800	1760	
ABS3-19-06	3/16"	1x19	7.8	800	1760	

PRODUCT	CABLE Ø	CABLE	BRE	EAKING I	_OAD
No.	in.	CONSTRUCTION	kN	kg	lb
ABS3-77-04	1/8"	7x7	6.3	646	1424
ABS3-77-05	5/32"	7x7	7.8	800	1760
ABS3-77-06	3/16"	7x7	7.8	800	1760

^{*} ABS3 Cable Systems require tamper resistant 'C' spanner/wrench, see page 45






SS ABS3 - Tamper Resistant Adjusters

ABS3 - Component Dimensions

SS Turnbuckle Body

Dimensions in Metric


THREAD Type	А	В	С	D	E	WEIGHT
	mm	mm	mm	mm	mm	g
1/4" UNF	6.0	82.0	8.0	4.8	5.0	52
					Dimensions	in Imperial
	in.	in.	in.	in.	in.	0Z
1/4" UNF	0.236	3.228	0.315	0.188	0.197	1.8



SS Threaded Swage Terminals

Dimensions in Metric


CAB	LE Ø	THREAD Type	Α	В	С	D	E	WEIGHT
mm	in.		mm	mm	mm	mm	mm	g
3.0	1/8"	1/4" UNF	4.0	39.0	133.0	75.0	7.0	13
4.0	5/32"	1/4" UNF	4.0	45.0	140.0	75.0	7.0	18
5.0	3/16"	1/4" UNF	4.0	44.0	139.0	75.0	7.0	25



	2 III IIIID	

							DIIIICIISIUIIS II	Timperiai
			in.	in.	in.	in.	in.	0Z
3.0	1/8"	1/4" UNF	0.157	1.535	5.236	2.953	0.276	0.5
4.0	5/32"	1/4" UNF	0.157	1.772	5.512	2.953	0.276	0.6
5.0	3/16"	1/4" UNF	0.157	1.732	5.472	2.953	0.276	0.9



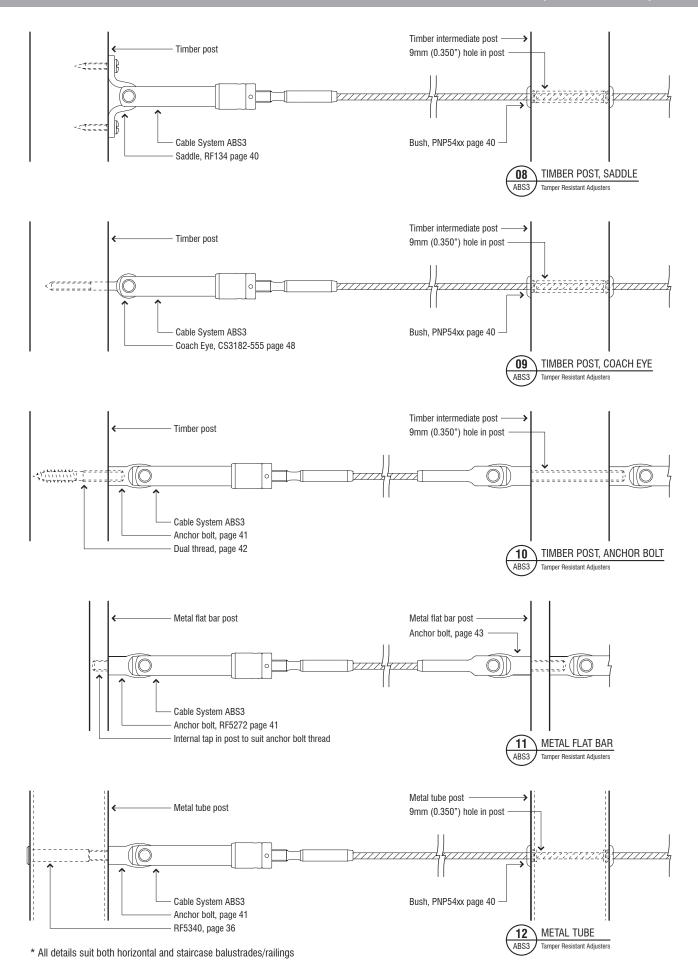

In-line Adjusters

ABS4

The ultimate system when style, innovation and fine quality is required. With no visible threads, the swivel tensioners blend perfectly into their environment, making for a simple, elegant and uncluttered system. ABS4 is perfect for residential and commercial settings where architecture and aesthetics are at the fore.


ABS4 - The premium slim line cable.



ABS4 - In-line Adjusters SS



ABS4 - Systems



SS Metric Cable

PRODUCT	CABLE Ø	CABLE		BREAKING LOAD	
No.	mm	CONSTRUCTION	kN	kg	lb
ABS4-77M03	3.0	7x7	4.6	469	1034
ABS4-77M04	4.0	7x7	8.1	826	1821
ABS4-77M05	5.0	7x7	12.0	1223	2693

^{*} Not available in 1x19 cable construction





SS ABS4 - In-line Adjusters


ABS4 - Component Dimensions

SS Turnbuckle Body

- 1/11	1116110	IUIIO		

WEIGHT	D	С	В	Α	THREAD Type	CABLE Ø
g	mm	mm	mm	mm		mm
28	8.0	10.0	35.0	113.0	M5	3.0
28	8.0	10.0	35.0	113.0	M6	4.0
48	10.0	13.0	35.0	133.0	M6	5.0
s in Imperial	Dimension					
07	in	in	in	in		in

					Dillicitototto	III IIIIporiui
in.		in.	in.	in.	in.	0Z
0.118	M5	4.449	1.378	0.394	0.315	1.0
0.157	M6	4.449	1.378	0.394	0.315	1.0
0.197	M6	5.236	1.378	0.512	0.315	1.7




SS Threaded Swage Terminals


Dimensions in Metric

CABLE Ø	THREAD Type	A	В	С	WEIGHT
mm		mm	mm	mm	g
3.0	M5	90.0	35.0	7.0	19
4.0	M6	90.0	35.0	8.0	19
5.0	M6	100.0	35.0	8.0	22

				Dimensions	in Imperial
in.		in.	in.	in.	0Z
0.118	M5	3.543	1.378	0.276	0.7
0.157	M6	3.543	1.378	0.315	0.7
0.197	M6	3.937	1.378	0.315	0.8





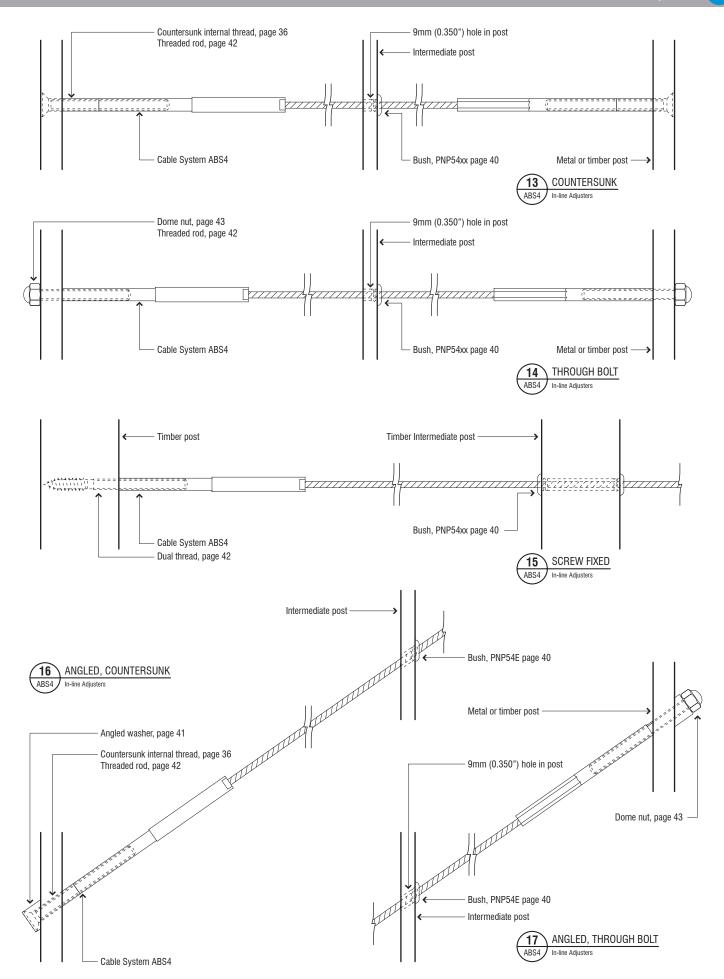

X-TEND® Mesh

ABS5

Superb aesthetics meets performance with Ronstan's flexible stainless steel cable mesh. When bordered by a frame or tensioned cable, you can use X-TEND® to achieve extremely effective and stylish balustrading/railing. X-TEND® mesh allows for optimal transparency while offering superior performance in security and barrier applications.

ABS5 - X-TEND® Mesh



ABS5 - Systems



Range Considerations

ABS5 X-TEND® stainless steel mesh is custom manufactured to suit your balustrade, railing or barrier application. A successful application involves careful consideration of the following options.

Mesh Size


Stainless steel cable diameters from 1mm to 4mm can be selected for the mesh material in accordance with the desired level of "lightness" or strength.

Mesh Aperture/Width

Mesh apertures range from 25mm to 300mm and can be selected for aesthetics, "climb ability" and the preferred level of transparency.


Connections/Ferrules


Mesh connections (ferrules) are available in nickel plated copper, or highly aesthetic stainless steel for premium applications or where resistance to corrosion is a driving consideration.

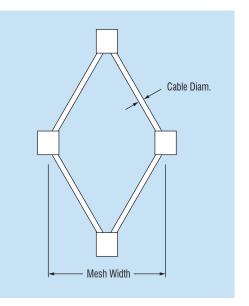

Mesh Orientation

Mesh can be applied in either a vertical or horizontal direction, again dependent on the balustrade or railing design and the required aesthetics.

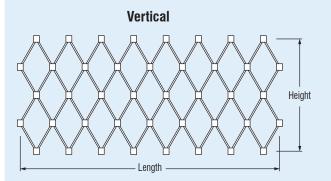

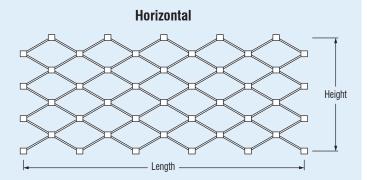

Border Fixings

X-TEND® mesh needs to be secured in place with either border cables or perimeter tubes. These transfer the force exerted around the complete perimeter of the flexible mesh panel to the supporting structure, balustrade or railing. Border cables deflect in response to this force adding unique and elegant form to the application. Where aesthetics demand a more linear or regular mesh panel free of deflection, then the mesh can be laced directly to a rod or tube frame.

Specification Support & Design Assistance

ABS5 X-TEND® mesh is a fully load rated elastic stainless steel mesh with properties that allow some fantastic three dimensional applications. For optimal results our Design Engineering Department can provide border and fixing recommendations, assistance with component selection and detailed CAD drawings.

BALUSTRADE & RAILING CABLE SYSTEM SPECIFICATIONS




SS ABS5 - X-TEND® Mesh



ABS5 - X-TEND® Mesh SS





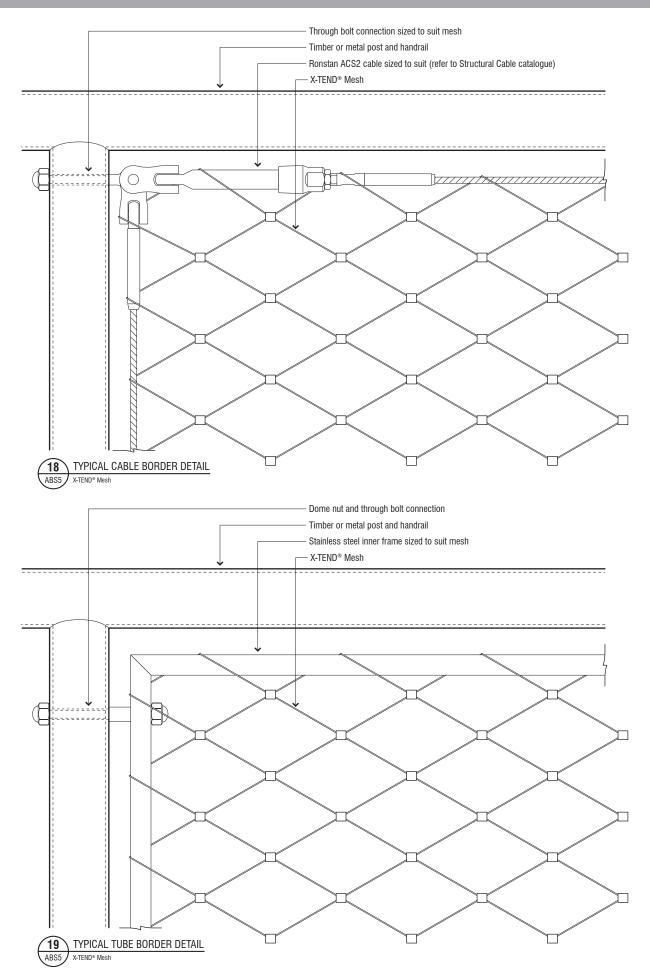



Variety and versatility to suit any application, Ronstan components show our many years of experience in dealing with diverse structural cable applications. The Ronstan name is built with these components and the knowledge of applying them to suit your needs.

Components - Quality, strength and distinction.





BANKARAKA KANARA



SS Turnbuckles / Adjusters

SS Microloc Turnbuckle Body


Dimensions in Metric

PRODUCT No.	THREAD Type	A mm	B mm	C mm	D mm	E mm	WEIGHT g
RF3200-04	1/4" UNF	6.0	52.0	7.5	4.8	5.0	35
RF3200P04*	1/4" UNF	6.0	52.0	7.5	4.8	5.0	35

Dimensions in Imperial

		in.	in.	in.	in.	in.	0Z
RF3200-04	1/4" UNF	0.236	2.047	0.295	0.188	0.197	1.2
RF3200P04*	1/4" UNF	0.236	2.047	0.295	0.188	0.197	1.2

^{*} Tamper-Resistant Press Pin Option




SS Microloc Turnbuckle body with Internal Thread

Dimensions in Metric

PRODUCT	THREAD	A	B	C	WEIGHT
No.	Type	mm	mm	mm	g
RF3207M8	1/4" UNF	10.0	52.5	M8 x 1.25	32

Dimensions in Imperial

		in.	in.	in.	0Z
RF3207M8	1/4" UNF	0.394	2.067	M8 x 1.25	1.1



SS Microloc Tamper Resistant Turnbuckle Body*


Dim	oncion	o in	Metric
DIIII	CII2IOII	2 111	IVICUIL

PRODUCT No.	THREAD Type	A mm	B mm	C mm	D mm	E mm	WEIGHT g
RF3205P04	1/4" UNF	6.0	82.0	7.5	4.8	5.0	52
RF3206-04	1/4" UNF	10.0	82.0	M10 x 1.5 (L.H.)	-	-	52

Dimensions in Imperial

		in.	in.	in.	in.	in.	0Z
RF3205P04	1/4" UNF	0.236	3.228	0.295	0.188	0.197	1.8
RF3206-04	1/4" UNF	0.394	3.228	M10 x 1.5 (L.H.)	-	-	1.8

^{*} Requires Tamper-Resistant 'C' spanner/wrench, see page 48

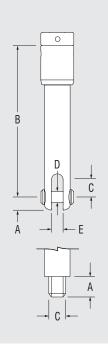




Swageless Turnbuckle with External Thread - Metric Cable

Dimensions in Metric

PRODUCT No.		CABLE Ø mm	THREAD Type	A mm	B mm	C mm	WEIGHT g
RH THREAD	LH THREAD						
1826-0300-030	1827-0300-030	3.0	M6	13.0	85.0	30.0	50
1826-0300-060	1827-0300-060	3.0	M6	13.0	115.0	60.0	55
1826-0400-030	1827-0400-030	4.0	M6	13.0	85.0	30.0	49
1826-0400-060	1827-0400-060	4.0	M6	13.0	115.0	60.0	54
1826-0500-030	1827-0500-030	5.0	M8	15.0	87.0	30.0	68
1826-0500-060	1827-0500-060	5.0	M8	15.0	117.0	60.0	78

Dimensions in Imperial

				in.	in.	in.	0Z
1826-0300-030	1827-0300-030	3.0	M6	0.512	3.346	1.181	1.8
1826-0300-060	1827-0300-060	3.0	M6	0.512	4.528	2.362	1.9
1826-0400-030	1827-0400-030	4.0	M6	0.512	3.346	1.181	1.7
1826-0400-060	1827-0400-060	4.0	M6	0.512	4.528	2.362	1.9
1826-0500-030	1827-0500-030	5.0	M8	0.591	3.425	1.181	2.4
1826-0500-060	1827-0500-060	5.0	M8	0.591	4.606	2.362	2.8




Swageless Turnbuckle with Internal Thread - Metric Cable

D	IIIIGIISIUII	s III IVIETITE	Caribia
	C	WEIGHT	
	mm	g	

PRODUCT No.		CABLE Ø mm	THREAD Type	A mm	B mm	C mm	WEIGHT g
RH THREAD	LH THREAD						
1831-0300	1832-0300	3.0	M6	13.0	55.0	18.0	42
1831-0400	1832-0400	4.0	M6	13.0	55.0	18.0	41
1831-0500	1832-0500	5.0	M8	15.0	57.0	20.0	53

-				
Illima /	ancion	OID	I mana	NEIOL
1711111		2 111	HILLING	:1141

				in	in.	in.	0Z
1831-0300	1832-0300	3.0	M6	0.512	2.165	0.709	1.5
1831-0400	1832-0400	4.0	M6	0.512	2.165	0.709	1.4
1831-0500	1832-0500	5.0	M8	0.591	2.244	0.787	1.9




S Toggle Turnbuckle - Imperial Cable

Dimensions in Metric

PRODUCT No.	CABLE Ø in.	THREAD Type	A mm	B mm	C min mm	C max mm
6TT3DT	1/8"	1/4" UNF	6.4	32.0	152.0	229.0
6TT4DT	5/32"	1/4" UNF	6.4	32.0	159.0	235.0
6TT5DT	3/16"	1/4" UNF	6.4	32.0	159.0	235.0

n	in	no	ne	io	ne	in	Imn	erial
ш	ш	ПG	119	ΙU	1119	- 1111	HIIIIh	GHAL

			in.	in.	in.	in.
6TT3DT	1/8"	1/4" UNF	0.252	1.260	5.984	9.016
6TT4DT	5/32"	1/4" UNF	0.252	1.260	6.260	9.252
6TT5DT	3/16"	1/4" UNF	0.252	1.260	6.260	9.252





SS Turnbuckles / Adjusters

SS Threaded Terminal Adjuster


-				
Him		e in	11/10	Tric
UIIII	ension	2 1111	IVIC	

PRODUCT	THREAD	A	B	C	D	E	WEIGHT
No.	Type	mm	mm	mm	mm	mm	g
RF5340	1/4" UNF	13.0	5.0	34.0	8.0	40.0	7

Dimensions in Imperial

		in.	in.	in.	in.	in.	0Z
RF5340	1/4" UNF	0.512	0.197	1.339	0.315	1.575	0.2






SS Threaded Terminal Adjuster - Countersunk Head

Dimensions in Metric

PRODUCT No.	THREAD Type	A mm	B mm	C mm	D mm	E mm	WEIGHT g
1866-0500-02	M5	10.4	7.0	28.0	2.0	1.7	9
1866-0600-02	M6	12.4	8.0	27.5	2.0	2.2	13

Dimensions in Imperial

		in.	in.	in.	in.	in.	0Z
1866-0500-02	M5	0.409	0.276	1.102	0.079	0.067	0.3
1866-0600-02	M6	0.488	0.315	1.083	0.079	0.087	0.5






SS Microloc Threaded Fork

-				
Dim		ie in	IV/I ot	ric
PIIII	ension	IO III	IVIGL	116

PRODUCT No.	A mm	B mm	C mm	D mm	E mm	WEIGHT g
RF3250-04	46.0	5.0	4.8	6.0	7.5	17
RF3250P04*	46.0	5.0	4.8	6.0	7.5	17

	in.	in.	in.	in.	in.	0Z
RF3250-04	1.811	0.188	0.197	0.236	0.295	0.6
RF3250P04*	1.811	0.188	0.197	0.236	0.295	0.6







SS Microloc Threaded Swage Terminals - Metric Cable

Dimensions in Metric

PRODUCT No.	CABLE Ø mm	THREAD Type	A mm	B mm	C mm	WEIGHT g
RF3211M0304	3.0	1/4" UNF	26.0	77.0	46.0	13
RF3211M0404	4.0	1/4" UNF	28.0	90.0	46.0	18
RF3211M0504	5.0	1/4" UNF	32.0	93.0	46.0	25

Dim	ensions	in Im	nerial

			in.	in.	in.	0Z
RF3211M0304	3.0	1/4" UNF	1.024	3.031	1.811	0.5
RF3211M0404	4.0	1/4" UNF	1.102	3.543	1.811	0.6
RF3211M0504	5.0	1/4" UNF	1.260	3.661	1.811	0.9

SS Microloc Threaded Swage Terminals - Imperial Cable

Dimensions in Metric

PRODUCT No.	CABLE Ø in.	THREAD Type	A mm	B mm	C mm	WEIGHT g
RF3210-0404	1/8"	1/4" UNF	26.0	77.0	46.0	13
RF3210-0504	5/32"	1/4" UNF	28.0	90.0	46.0	18
RF3210-0604	3/16"	1/4" UNF	32.0	93.0	46.0	25
RF3210-0804	1/4"	1/4" UNF	42.0	96.0	46.0	40

Dimensions in Imperial

			in.	in.	in.	0Z
RF3210-0404	1/8"	1/4" UNF	1.024	3.031	1.811	0.5
RF3210-0504	5/32"	1/4" UNF	1.102	3.543	1.811	0.6
RF3210-0604	3/16"	1/4" UNF	1.260	3.661	1.811	0.9
RF3210-0804	1/4"	1/4" UNF	1.654	3.780	1.811	1.4


SS Threaded Swage Terminals - Metric Cable

-				
Him	oncion	e in	Matri	0
UIIII		9 111	MIGHI	l U

PRODUCT	CABLE Ø	THREAD	Α	В	C	D	E	WEIGHT
No.	mm	TYPE	mm	mm	mm	mm	mm	g
RF1512M0304	3.0	1/4" UNF	4.0	39.0	133.0	75.0	7.0	25
RF1512M0404	4.0	1/4" UNF	4.0	45.0	140.0	75.0	7.0	30
RF1512M0504	5.0	1/4" UNF	4.0	44.0	139.0	75.0	7.0	41

		-				
Dim	one	non:	e in	Imn	Ωri	വ
UIIII		SIUII	9 111	HIIID	GH	aп

			in.	in.	in.	in.	in.	0Z
RF1512M0304	3.0	1/4" UNF	0.157	1.535	5.236	2.953	0.276	0.9
RF1512M0404	4.0	1/4" UNF	0.157	1.772	5.512	2.953	0.276	1.1
RF1512M0504	5.0	1/4" UNF	0.157	1.732	5.472	2.953	0.276	1.4



宽 Threaded Swage Terminals - Imperial Cable

Dinne	engion		B. H. and Land L.	
HHIM		e in	IVIATEL	Э.

PRODUCT No.	CABLE Ø in.	THREAD Type	A mm	B mm	C mm	D mm	E mm	WEIGHT g
RF1510-0404	1/8"	1/4" UNF	4.0	39.0	132.0	75.0	7.0	25
RF1510-0504	5/32"	1/4" UNF	4.0	45.0	141.0	75.0	7.0	30
RF1510-0604	3/16"	1/4" UNF	4.0	44.0	139.0	75.0	7.0	41

			in.	in.	in.	in.	in.	0Z
RF1510-0404	1/8"	1/4" UNF	0.157	1.535	5.197	2.953	0.276	0.9
RF1510-0504	5/32"	1/4" UNF	0.157	1.772	5.551	2.953	0.276	1.1
RF1510-0604	3/16"	1/4" UNF	0.157	1.732	5.472	2.953	0.276	1.4



SS Fixed End Components

SS End Stop Terminals - Metric Cable


PRODUCT	CABLE Ø	Α	В	С	D	E	WEIGHT
No.	mm	mm	mm	mm	mm	mm	g
RF3213M03	3.0	13.0	8.0	26.0	6.4	31.0	8
RF3213M04	4.0	13.0	8.0	28.0	6.4	35.0	8
RF3213M05	5.0	13.0	8.0	32.0	7.6	41.5	14





Dimensions in Metric

		in.	in.	in.	in.	in.	0Z
RF3213M03	3.0	0.512	0.315	1.024	0.252	1.220	0.3
RF3213M04	4.0	0.512	0.315	1.102	0.252	1.378	0.3
RF3213M05	5.0	0.512	0.315	1.260	0.299	1.634	0.5



SS End Stop Terminals - Imperial Cable

PRODUCT No.	CABLE Ø in.	A mm	B mm	C mm	D mm	E mm	WEIGHT g
RF3212-04	1/8"	13.0	8.0	26.0	6.4	31.0	8
RF3212-05	5/32"	13.0	8.0	28.0	6.4	35.0	8
RF3212-06	3/16"	13.0	8.0	32.0	7.6	41.5	14

Dimensions in Imperial

Dimensions in Metric

		in.	in.	in.	in.	in.	0Z
RF3212-04	1/8"	0.512	0.315	1.024	0.252	1.220	0.3
RF3212-05	5/32"	0.512	0.315	1.102	0.252	1.378	0.3
RF3212-06	3/16"	0.512	0.315	1.260	0.299	1.634	0.5

SS Deck Toggle - Imperial Cable

Dimensions in Metric

PRODUCT No.	CABLE Ø in.	THREAD Type	A mm	B mm	
6TJ3DT	1/8"	1/4 UNF	6.4	32.0	
6TJ4DT	5/32"	1/4 UNF	6.4	32.0	
6TJ5DT	3/16"	1/4 UNF	6.4	32.0	




			in.	in.
6TJ3DT	1/8"	1/4 UNF	0.252	1.260
6TJ4DT	5/32"	1/4 UNF	0.252	1.260
6TJ5DT	3/16"	1/4 UNF	0.252	1.260



SS End Stop Terminals, Countersunk Head - Metric Cable

Dimensions in Metric

PRODUCT No.	CABLE Ø mm	A mm	B mm	C mm	D mm	WEIGHT g
1866-0300-04	3.0	8.0	4.5	9.0	10.0	1
1866-0400-04	4.0	10.0	5.0	12.0	13.5	2
1866-0500-04	5.0	12.0	6.0	15.0	18.3	3




Dimensions in Imperial

		in.	in.	in.	in.	0Z
1866-0300-04	3.0	0.177	0.315	0.354	0.394	0.1
1866-0400-04	4.0	0.197	0.394	0.472	0.531	0.1
1866-0500-04	5.0	0.236	0.472	0.591	0.720	0.1

SS Microloc Swage Forks - Metric Cable

-						
- 11	im	ion	C	in.	otr	i O
$ \nu$		IUII	O.		G LI	IЫ

PRODUCT No.	CABLE Ø mm	PIN Ø mm	A mm	B mm	C mm	D mm	E mm	WEIGHT g
RF3221M03	3.0	4.8	43.0	17.0	6.0	4.8	7.5	14
RF3221PM03*	3.0	4.8	43.0	17.0	6.0	4.8	7.5	14
RF3221M04	4.0	4.8	46.0	17.0	6.0	4.8	7.5	17
RF3221PM04*	4.0	4.8	46.0	17.0	6.0	4.8	7.5	17
RF3221M05	5.0	4.8	49.0	17.0	6.0	4.8	7.5	18



Dimensions in Imperial

		in.	in.	in.	in.	in.	in.	0Z
RF3221M03	3.0	0.188	1.693	0.669	0.236	0.188	0.295	0.5
RF3221PM03*	3.0	0.188	1.693	0.669	0.236	0.188	0.295	0.5
RF3221M04	4.0	0.188	1.811	0.669	0.236	0.188	0.295	0.6
RF3221PM04*	4.0	0.188	1.811	0.669	0.236	0.188	0.295	0.6
RF3221M05	5.0	0.188	1.929	0.669	0.236	0.188	0.295	0.6

^{*} Tamper-Resistant Clevis Pin Style

S Microloc Swage Forks - Imperial Cable

Dimensions in Metric

PRODUCT No.	CABLE Ø in.	A mm	B mm	C mm	PIN Ø mm	D mm	E mm	WEIGHT g
RF3220-04	1/8"	43.0	17.0	6.0	4.8	4.8	7.5	14
RF3220P04*	1/8"	43.0	17.0	6.0	4.8	4.8	7.5	14
RF3220-05	5/32"	43.0	17.0	6.0	4.8	4.8	7.5	17
RF3220P05*	5/32"	43.0	17.0	6.0	4.8	4.8	7.5	17
RF3220-06	3/16"	49.0	17.0	6.0	4.8	4.8	7.5	18
RF3220P06*	3/16"	49.0	17.0	6.0	4.8	4.8	7.5	18

		in.	in.	in.	in.	in.	in.	0Z
RF3220-04	1/8"	1.693	0.669	0.236	0.188	0.188	0.295	0.5
RF3220P04*	1/8"	1.693	0.669	0.236	0.188	0.188	0.295	0.5
RF3220-05	5/32"	1.693	0.669	0.236	0.188	0.188	0.295	0.6
RF3220P05*	5/32"	1.693	0.669	0.236	0.188	0.188	0.295	0.6
RF3220-06	3/16"	1.929	0.669	0.236	0.188	0.188	0.295	0.6
RF3220P06*	3/16"	1.929	0.669	0.236	0.188	0.188	0.295	0.6

^{*} Tamper-Resistant Clevis Pin Style

^{**} M03 & M04 uses 3mm die when swaging

^{***} M05 uses 4mm die when swaging

^{** 04 &}amp; 05 uses 3mm die when swaging


^{*** 06} uses 4mm die when swaging

SS Bushes / Saddles

Bushes

Dimensions in Metric

PRODUCT No.	A mm	B mm	C mm	D mm	WEIGHT g
PNP54DBLK	4.2	7.8	13.0	9.0	1
PNP54DS	4.2	7.8	13.0	9.0	1
PNP54FB	6.0	10.0	14.0	10.0	1.2
PNP54FS	6.0	10.0	14.0	10.0	1.2



270.7		
Himo	ne in	OPIO
Dime	19 111	GHA


	in.	in.	in.	in.	0Z
PNP54DBLK	0.165	0.307	0.512	0.354	0.1
PNP54DS	0.165	0.307	0.512	0.354	0.1
PNP54FB	0.236	0.394	0.551	0.394	0.1
PNP54FS	0.236	0.394	0.551	0.394	0.1



S - Silver

Angled Bushes Dimensions in Metric

PRODUCT No.	A mm	B mm	C mm	D mm	WEIGHT g
PNP54EB	4.2	6.6	14.8	9.0	1
PNP54ES	4.2	6.6	14.8	9.0	1



Dimensions in Imperial


	in.	in.	in.	in.	0Z
PNP54EB	0.165	0.260	14.8	0.354	0.1
PNP54ES	0.165	0.260	14.8	0.354	0.1

BLK, B - Black S - Silver

SS Saddles

Dimon	oiono	1.00	N/I o	Aut o

PRODUCT No.	A mm	B mm	C mm	D mm	WEIGHT g
RF498	10.0	3.5	27.0	4.0	4
RF134	14.0	4.8	36.5	5.0	5
RF134A	14.0	4.8	36.5	5.0	5
RF1055	16.0	7.0	45.0	6.0	15
RF1054	18.0	5.5	60.0	8.0	35
RF528	12.0	7.0	44.0	8.0	25



	in.	in.	in.	in.	0Z
RF498	0.394	0.138	1.063	0.157	0.1
RF134	0.551	0.189	1.437	0.197	0.2
RF134A	0.551	0.189	1.437	0.197	0.2
RF1055	0.630	0.276	1.772	0.236	0.5
RF1054	0.709	0.217	2.362	0.315	1.2
RF528	0.472	0.276	1.732	0.315	0.9





Angled Bushes

Dimensions in Metric

PRODUCT No.	A mm	B mm	C degrees	WEIGHT g
RF5351*	8.1	11.0	35.0	2
RF5352*	6.4	11.0	35.0	2
PNP244ABLK**	8.5	15.0	35.0	1
PNP244AS**	8.5	15.0	35.0	1
PNP244BBLK**	6.5	15.0	35.0	1
PNP244BS**	6.5	15.0	35.0	1



Dimensions in Imperial

	in.	in.		0Z
RF5351*	0.319	0.433	35.0	0.1
RF5352*	0.252	0.433	35.0	0.1
PNP244ABLK**	0.335	0.591	35.0	0.1
PNP244AS**	0.335	0.591	35.0	0.1
PNP244BBLK**	0.256	0.591	35.0	0.1
PNP244BS**	0.256	0.591	35.0	0.1

^{*} Grade 316 Stainless Steel

BLK - Black

S - Silver



SS Angled Bushes for Countersunk End Stops

Dillieli210112 III Metric	Caribia
WEIGHT	
g	

PRODUCT No.	A mm	B mm	C degrees	WEIGHT g
1862-03-2	7.3	13.0	35.0	2
1862-04-2	8.3	13.0	35.0	2

\		- 1
	Α	В
/-/,[1	
C >		
• • • • • • • • • • • • • • • • • • • •		


Dim	oncion	e in	l m	
יווווע	ension	9 111		ıaı

	in.	in.		0Z
1862-03-2	0.287	0.512	35.0	0.1
1862-04-2	0.327	0.512	35.0	0.1

SS Anchor Bolts / Anchor Nuts


Dimensions in Metric

PRODUCT No.	THREAD Type	A mm	B mm	C mm	D mm	E mm	F mm	WEIGHT g
RF5270	1/4" UNF	6.4	4.8	23.0	27.0	14.4	47.0	19
RF5271	1/4" UNF	6.4	4.8	23.0	54.0	14.4	76.0	27
RF5272	M6	6.1	4.8	23.0	9.0	14.4	38.5	18
RF5280*	1/4" UNF	6.4	4.8	23.0	27.0	14.4	47.0	26
RF5290**	1/4" UNF	6.4	4.8	23.0	8.0	14.4	22.5	12
RF5292**	M8	6.4	4.8	23.0	8.0	14.4	22.5	12



		in.	in.	in.	in.	in.	in.	0Z
RF5270	1/4" UNF	0.252	0.189	0.906	1.063	0.567	1.850	0.7
RF5271	1/4" UNF	0.252	0.189	0.906	2.126	0.567	2.992	1.0
RF5272	M6	0.240	0.189	0.906	0.354	0.567	1.516	0.6
RF5280*	1/4" UNF	0.252	0.189	0.906	1.063	0.567	1.850	0.9
RF5290**	1/4" UNF	0.252	0.189	0.906	0.315	0.567	0.886	0.4
RF5292**	M8	0.252	0.189	0.906	0.315	0.567	0.886	0.4

^{*} Nut and washer supplied ** Internal thread



^{**} Nylon



SS End Post Attachments

SS Dual Thread Screw

Dimensions in Metric

PRODUCT No.		THREAD Type	A mm	B mm	C mm	WEIGHT g
RH THREAD	LH THREAD					
1878-0500	1877-0500	M5	50.0	30.0	20.0	5
1878-0600	1877-0600	M6	70.0	40.0	30.0	9
1878-0800	1877-0800	M8	100.0	60.0	40.0	26



			in.	in.	in.	0Z
1878-0500	1877-0500	M5	1.969	1.181	0.787	0.2
1878-0600	1877-0600	M6	2.756	1.575	1.181	0.3
1878-0800	1877-0800	M8	3.937	2.362	1.575	0.9

SS Threaded Stud

Dimensions in Metric

PRODUCT No.		THREAD Type	A mm	WEIGHT g
RH THREAD	LH THREAD			
1882-0500-060	1883-0500-060	M5	60.0	7
1882-0500-100	1883-0500-100	M5	100.0	12
1882-0600-060	1883-0600-060	M6	60.0	9
1882-0600-100	1883-0600-100	M6	100.0	17
1882-0800-060	1883-0800-060	M8	60.0	19
1882-0800-120	1883-0800-120	M8	120.0	37

Dimensions in Imperial

			in.	0Z
1882-0500-060	1883-0500-060	M5	2.362	0.2
1882-0500-100	1883-0500-100	M5	3.937	0.4
1882-0600-060	1883-0600-060	M6	2.362	0.3
1882-0600-100	1883-0600-100	M6	3.937	0.6
1882-0800-060	1883-0800-060	M8	2.362	0.7
1882-0800-120	1883-0800-120	M8	4.724	1.3




SS Pan Head Screw

	Metric

PRODUCT No.	THREAD Type	A mm	B mm	WEIGHT g
1890-0500-030	M5	9.5	30.0	4
1890-0600-030	M6	10.5	30.0	6
1890-0800-040	M8	14.0	40.0	15

		in.	in.	0Z
1890-0500-030	M5	0.374	1.181	0.1
1890-0600-030	M6	0.413	1.181	0.2
1890-0800-040	M8	0.551	1.575	0.3



SS Hex Head Screw


Dimensions in Metric

PRODUCT No.	THREAD Type	A mm	B mm	C mm	WEIGHT g
1843-0500	M5	8.0	30.0	3.5	5
1843-0600	M6	10.0	30.0	4.0	8
1843-0800	M8	13.0	40.0	5.3	18



Dim	ension	e in l	mno	PLO
		9 111 1	IIIIDG	IIA


		in.	in.	in.	0Z
1843-0500	M5	0.315	1.181	0.138	0.2
1843-0600	M6	0.394	1.181	0.157	0.3
1843-0800	M8	0.512	1.575	0.209	0.6



SS Drop in Anchor

Dimensions in Metric

PRODUCT No.	THREAD Type	NOM. HOLE DEPTH mm	A mm	B mm	C mm	WEIGHT g
RF5266	M6	30.0	28.0	10.0	8.0	70
RF5268	M8	38.0	36.0	12.0	10.0	95



Dimensions in Imperial


		in.	in.	in.	in.	0Z
RF5266	M6	1.181	1.102	0.394	0.315	2.3
RF5268	M8	1.496	1.417	0.472	0.394	3.1

SS Hex Nut

n:			oi.	200	s in	ŊЛ	otui.	
IJΙ	IIIt	711	21	JIIS	5 111	IVI	etri	5



PRODUCT No.		THREAD Type	A mm	B mm	C mm	WEIGHT g
RH THREAD	LH THREAD					
1892-0500	1893-0500	M5	8.0	8.8	4.0	5
1892-0600	1893-0600	M6	10.0	11.1	5.0	5
1892-0800	1893-0800	M8	13.0	14.4	6.5	6
NS-04	-	1/4" UNF	11.1	12.7	5.6	3



Dimensions in Imperial


			in.	in.	in.	0Z
1892-0500	1893-0500	M5	0.315	0.346	0.157	0.2
1892-0600	1893-0600	M6	0.394	0.437	0.197	0.2
1892-0800	1893-0800	M8	0.512	0.567	0.256	0.2
NS-04	-	1/4" UNF	0.437	0.500	0.220	0.1



SS Dome Nut

Dimensions in Metric

Product No.	THREAD Type	A mm	B mm	C mm	WEIGHT g
1892-0500-02	M5	8.0	8.8	5.0	5
1892-0600-02	M6	10.0	11.1	6.0	5
1892-0800-02	M8	13.0	14.4	8.0	6



		in.	in.	in.	0Z
1892-0500-02	M5	0.315	0.346	0.197	0.2
1892-0600-02	M6	0.394	0.437	0.236	0.2
1892-0800-02	M8	0.512	0.567	0.315	0.2



SS Hand Swaging Components / Tools

SS Thimbles*

Dimensions in Metric


PRODUCT No.	RECOMN CABL		A mm	B mm	C mm	WEIGHT g
RF482	3.0	1/8"	10.0	4.0	18.0	2
RF483	4.0	5/32"	11.0	5.0	19.0	5
RF484	5.0	3/16"	13.0	6.0	23.0	5
RF485	6.0	1/4"	15.0	7.5	28.0	15



Dimensions in Imperial

	mm	in.	in.	in.	in.	0Z
RF482	3.0	1/8"	0.394	0.157	0.709	0.1
RF483	4.0	5/32"	0.433	0.197	0.748	0.2
RF484	5.0	3/16"	0.512	0.236	0.906	0.2
RF485	6.0	1/4"	0.591	0.295	1.102	0.5

^{*} Material - Grade 304 Stainless Steel



Ferrules*

Dimensions in Metric

PRODUCT No.	RECOMMENDED Cable Ø	A mm	WEIGHT g
RF3172	3.0 1/8"	14.0	5
RF3173	4.0 5/32"	18.5	10
RF3174	5.0 3/16"	19.0	15
RF3175	6.0 1/4"	20.0	22



Dimensions in Imperial

				·
	mm	in.	in.	0Z
RF482	3.0	1/8"	0.551	0.2
RF483	4.0	5/32"	0.728	0.4
RF484	5.0	3/16"	0.748	0.5
RF485	6.0	1/4"	0.787	0.8

^{*} Material - Nickel plated copper



Swaging Tools

Dimensions in Metric


PRODUCT No.	LENGTH	TO SUIT CABLE Ø mm	WEIGHT g
CLA731	300	1.0, 1.5, 2.0, 2.5	730
CLA763	600	2.0, 2.5, 3.0	2300
CLA774	750	3.0, 4.0	3980
CLA775	750	4.0, 5.0	3960
CLA776	750	6.0	3930



Cutters

Dimensions in Metric

PRODUCT No.	CUTS MAX CABLE Ø mm	WEIGHT g
CLA606	4.0	310
CLA609	6.0	720



SS Microloc Tamper Resistant 'C' Spanner/Wrench

Dimensions in Metric

Product	WEIGHT
No.	g
RF3205S	23

Dimensions in Imperial


	02
RF3205S	0.8





SS 1x19 Grade 316 Cable Reels

Dimensions in Metric







SS 7x7 Grade 316 Cable Reels

Dimensions in Metric

PRODUCT	CABLE Ø	REEL LENGTH	BREAKING LOAD			WEIGHT
No.	mm	m	kN	kg	lb.	g/m
WR677-03M	3.0	305	5.3	544	1200	35
WR677-04M	4.0	305	9.4	958	2113	63
WR677-05M	5.0	305	14.8	1509	3327	98



Swaging Dimensions

Correct installation of a swage fitting requires that the shank of the fitting be formed down onto the cable with specialised dies and presses in accordance with the following:

CABLE DIAMETER	mm	3.0	4.0	5.0	6.0
	in.	1/8	5/32	3/16	1/4
Code	mm	03M	04M	05M	06M
	in.	04	05	06	08
Length of Cable Inside Swage	mm	38.4	45	55	70
	in.	1.510	1.770	2.170	2.760
Diameter O.D. Before Swaging	mm	6.4	7.5	9.1	12.6
	in.	0.250	0.297	0.359	0.494
Diameter O.D. After Swaging	mm	5.6	6.4	8.0	11.1
	in.	0.219	0.250	0.313	0.438
Tolerance on O.D.	mm	+0, -0.13	+0, -0.13	+0, -0.13	+0, -0.18
	in.	+0, -0.005	+0, -0.005	+0, -0.005	+0, -0.007





CG Turnbuckles / Adjusters

Commodity Grade Closed Body Fork / Swage Turnbuckles - Metric Cable


Dimensions in Metric

PRODUCT No.	CABLE Ø mm	THREAD Type	A mm	B mm	C MIN mm	C MAX mm	WEIGHT g
CS3121P-M03M5	3.0	M5	7.0	5.0	150.0	215.0	43
CS3121P-M03M6	3.0	M6	8.0	6.0	175.0	257.0	75
CS3121P-M04M6	4.0	M6	8.0	6.0	193.0	270.0	80

-			
Dim		ne in l	mnorial
יווווע	CIIOIU	119 111 1	mperial

			in.	in.	in.	in.	0Z
CS3121P-M03M5	3.0	M5	0.276	0.197	5.906	8.465	1.5
CS3121P-M03M6	3.0	M6	0.315	0.236	6.890	10.118	2.4
CS3121P-M04M6	4.0	M6	0.315	0.236	7.598	10.630	2.6

^{*} Note these dimensions are subject to change without notice



Commodity Grade Closed Body Fork / Swage Turnbuckles - Imperial Cable

PRODUCT No.	CABLE Ø in.	THREAD Type	A mm	B mm	C min mm	C max mm	WEIGHT g
CS3121P-04M5	1/8"	M5	7.0	5.0	160.0	230.0	43
CS3121P-04M6	1/8"	M6	8.0	6.0	175.0	257.0	91
CS3121P-05	5/32"	M8	11.0	8.0	206.0	298.0	142

Dimensions in Imperial

Dimensions in Metric

			in.	in.	in.	in.	0Z
CS3121P-04M5	1/8"	M5	0.276	0.197	6.299	9.055	1.5
CS3121P-04M6	1/8"	M6	0.315	0.236	6.890	10.118	3.2
CS3121P-05	5/32"	M8	0.433	0.315	8.110	11.732	5.0

^{*} Note these dimensions are subject to change without notice

Commodity Grade Open Body Eye / Eye Turnbuckles

Dimensions in Metric

PRODUCT No.	THREAD Type	A mm	B mm	C MIN mm	C MAX mm	WEIGHT g
CS311-5E	M5	10.0	10.0	126.0	181.0	46
CS311-6E	M6	12.0	12.0	153.0	220.0	87

		in.	in.	in.	in.	0Z
CS311-5E	M5	0.394	0.394	4.961	7.126	1.6
CS311-6E	M6	0.472	0.472	6.024	8.661	3.1

^{*} Note these dimensions are subject to change without notice



66 Commodity Grade Open Body Eye / Hook Turnbuckles


Dimensions in Metric

PRODUCT No.	THREAD Type	A mm	B mm	C MIN mm	C MAX mm	WEIGHT g
CS311-5H	M5	7.0	10.0	127.0	180.0	48
CS311-6H	M6	9.0	12.0	161.0	230.0	88

Dimensions in Imperial

		in.	in.	in.	in.	0Z
CS311-5H	M5	0.276	0.394	5.000	7.087	1.7
CS311-6H	M6	0.354	0.472	6.339	9.055	3.1

^{*} Note these dimensions are subject to change without notice



CG Commodity Grade Open Body Fork / Fork Turnbuckles


Dimensions in Metric

PRODUCT No.	THREAD Type	A mm	B mm	C mm	D mm	WEIGHT g
CS312-5F	M5	7.0	5.0	130.0	200.0	43
CS312-6F	M6	8.0	6.0	152.0	220.0	94

Dimensions in Imperial

		in.	in.	in.	in.	0Z
CS312-5F	M5	0.276	0.197	5.118	7.874	1.5
CS312-6F	M6	0.315	0.236	5.984	8.661	3.3

^{*} Note these dimensions are subject to change without notice




CG Commodity Grade Closed Body Fork / Fork Turnbuckles

Dimensions in Metric

PRODUCT No.	THREAD Type	A mm	B mm	C min mm	C max mm	WEIGHT g
CS312P-5	M5	7.0	5.0	130.0	200.0	43
CS312P-6	M6	8.0	6.0	152.0	220.0	94

		in.	in.	in.	in.	0Z
CS312P-5	M5	0.276	0.197	5.118	7.874	1.5
CS312P-6	M6	0.315	0.236	5.984	8.661	3.3

^{*} Note these dimensions are subject to change without notice






CG Fixed End Components

66 Commodity Grade Swage Forks - Metric Cable

Dimensions in Metric

PRODUCT No.	CABLE Ø mm	A mm	B mm	C mm	WEIGHT g
CS7803-M03M5	3.0	74.0	5.0	7.0	24
CS7803-M03M6	3.0	75.0	6.0	8.0	26
CS7803-M04M6	4.0	75.0	6.0	8.0	32
CS7803-M05	5.0	88.0	9.0	13.0	68



Dim			

		in.	in.	in.	0Z
CS7803-M03M5	3.0	2.913	0.197	0.276	0.8
CS7803-M03M6	3.0	2.953	0.236	0.315	0.9
CS7803-M04M6	4.0	2.953	0.236	0.315	1.0
CS7803-M05	5.0	3.465	0.354	0.512	2.4

^{*} Note these dimensions are subject to change without notice

GG Commodity Grade Swage Forks - Imperial Cable

Dimensions in Metric

PRODUCT No.	CABLE Ø in.	A mm	B mm	C mm	WEIGHT g
CS7803-04M5	1/8"	74.0	5.0	7.0	22
CS7803-04M6	1/8"	75.0	6.0	8.0	24
CS7803-05	5/32"	77.0	8.0	8.0	44

Dimensions in Imperial

		in.	in.	in.	0Z
CS7803-04M5	1/8"	2.913	0.197	0.276	0.8
CS7803-04M6	1/8"	2.953	0.236	0.315	0.8
CS7803-05	5/32"	3.031	0.315	0.315	1.6


^{*} Note these dimensions are subject to change without notice

CG Commodity Grade Coach Eyes **Dimensions in Metric**

PRODUCT	A	В	C	D	E	F	WEIGHT
No.	mm	mm	mm	mm	mm	mm	g
CS3182-555	7.0	4.0	70.0	39.0	5.0	5.0	16
CS3182-655	6.0	4.0	70.0	39.0	5.0	7.0	16
CS3182-860	8.0	5.0	96.0	54.0	6.0	9.0	34
CS3182-1080	10.0	5.0	99.0	55.0	8.0	12.0	52

PR 1	onoio			
Him	ancia	ne in	Imno	APLOI I
UIIII	CIIOIU	111 611	HIIIDE	51 I A I I

						Dillioliololi	o iii iiiipoiitai
	in.	in.	in.	in.	in.	in.	0Z
CS3182-555	0.276	0.157	2.756	1.535	0.197	0.197	0.6
CS3182-655	0.236	0.157	2.756	1.535	0.197	0.276	0.6
CS3182-860	0.315	0.197	3.780	2.126	0.236	0.354	1.2
CS3182-1080	0.394	0.197	3.898	2.165	0.315	0.472	1.8

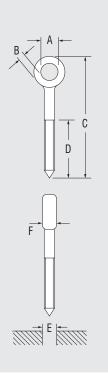




C Commodity Grade Threaded Swage Terminals - Metric Cable

PRODUCT No.	CABLE Ø mm	THREAD Type	A mm	B mm	C mm	WEIGHT g
CS7801-M03M5	3.0	M5	40.0	91.0	41.0	41
CS7801-M03M6	3.0	M6	40.0	98.0	48.0	48
CS7801-05	4.0	M8	48.0	116.0	57.0	57
CS7801-M5	5.0	M10	58.0	129.0	62.0	62

			in.	in.	in.	0Z
CS7801-M03M5	3.0	M5	1.575	3.583	1.614	1.4
CS7801-M03M6	3.0	M6	1.575	3.858	1.890	1.7
CS7801-05	4.0	M8	1.890	4.567	2.244	2.0
CS7801-M5	5.0	M10	2.283	5.079	2.441	2.2

^{*} Note these dimensions are subject to change without notice



B Commodity Grade Threaded Swage Terminals - Imperial Cable

n		n		C	ī	P1	91	S	ī	m	1			Ť.	М	P
J					ш	ш		0		ш		ш	U	ы		U

PRODUCT	CABLE Ø	THREAD	Α	В	C	WEIGHT
No.	in.	TYPE	mm	mm	mm	g
CS7801-04M5	1/8"	M5	40.0	91.0	41.0	41
CS7801-04M6	1/8"	M6	40.0	98.0	48.0	48
CS7801-05	5/32"	M8	48.0	116.0	57.0	57

			in.	in.	in.	0Z
CS7801-04M5	1/8"	M5	1.575	3.583	1.614	1.4
CS7801-04M6	1/8"	M6	1.575	3.858	1.890	1.7
CS7801-05	5/32"	M8	1.890	4.567	2.244	2.0

^{*} Note these dimensions are subject to change without notice

IMPORTANT CUSTOMER INFORMATION

CUSTOMER CONSIDERATIONS

Factor of Safety

An appropriate factor of safety should be applied to Breaking Load (B.L.) figures to suit each application before choosing or specifying a particular product. For many industrial and safety related applications, a factor of safety greater than two (2) should be used or may be required by law or other regulations. It is the customer's responsibility to ensure that anappropriate factor of safety is used, and it should allow for safety implications, service life, fatigue (as may be caused by wind stresses or repetitive cyclical loading), type of load, exposure to ultraviolet light, corrosion and stress corrosion (such as in high humidity or chlorine environments). Note that a 'safe working load' is not specified as this is dependent on the factor of safety, which must be determined by the user relative to each application.

The useful life of any product is determined by the above factors and must be assessed in each application, and thus no guarantee can be provided for product life, load capacity or any other factor due to the variability in usage. In some jurisdictions government regulations require the replacement of rigging components within certain periods of time, usually every three to five years. You must ascertain whether any such regulations affect you. While every precaution is taken in the product design and manufacturing processes to minimize the effects of corrosion and stress corrosion, there are also preventative as well as corrective treatments that can be carried out after installation. Contact your local representative for further assistance and advice.

All catalogue information is subject to specification changes during a product's life-cycle. Any alterations will be posted on the Website: - www.ronstan.com which should be considered the most up to date source of product information.

DEFINITIONS

Breaking Load (B.L.)

Breaking Load (B.L.) is the load at, or around which, a major failure can be expected to occur to some part of the product's structure when new. Components may split, rivets may give way, bodies may break, and other metallic components may fracture. No product should be used at more than half of the breaking load, so as to provide a minimum safety factor of two (2).

WARRANTY

In addition to your rights implied by law, the goods manufactured or sold are warranted to be free of defects in materials or workmanship for three (3) years from the date of purchase by the original purchaser except that:

- This warranty shall not apply to any product which has been improperly fitted, improperly maintained, or used in any application for which it was not intended.
- · This warranty shall not apply to normal wear which can reasonably be expected in normal use of the product.
- This warranty does not apply to commodity grade products where Ronstan has no control over manufacture process.
- · No warranties are made that any products are fit for a particular purpose.
- The liability shall be limited to the repair or replacement, at the manufacturer's discretion, of the defective goods.
- · The useful life of any rigging product is determined by the above factors and must be assessed in each application, and thus no guarantee can be provided for product life, load capacity or any other factor due to the variability in usage.

.www.ronstan.com

Ronstan also specializes in providing architectural products for:

- Structural Cable applications
- Structural Rod applications
- Cable Nets
- Greening Cables
- Facade Cables

Contact us for catalogues or further information

HEAD OFFICE Australia - Victoria

Ronstan International Pty. Ltd 220 Bay Road, Sandringham Victoria 3191, Australia +61 (0)3 8599 0000 +61 (0)3 8599 0090 architectural@ronstan.com.a.

Denmark

Ronstan Denmark Ap

Karetmagervej 23 7100 Vejle, Denmark +45 76 40 82 00 +45 76 40 82 01 office@ronstan.dk

New Zealand

Ronstan International Pty. Ltd
P.O. Box 91 200
Auckland Mail Centre
Auckland, New Zealand
+64 (0)9 418 2733
+64 (0)9 418 2733

United Kingdom

Harbour Road, Gospo Hampshire P012 1BG, U +44 (0)23 9252 537 +44 (0)23 9252 096

Australia - New South Wales

Ronstan International Pty. Ltd Unit 67, 42-46 Wattle Road, Brookval New South Wales 2100, Australi

Australia - Queensland

Unit 1, 1029 Manly Road, Tingalpa

Oueensland 4173 Australia

Australia - Western Australia

Ronstan International Pty. Ltd. 1C, No.1 Norfolk Street, Fremantle Western Australia 6160. Australia

> +61 (0)3 8599 0000 +61 (0)3 8599 0099

USA - Rhode Island

Ronstan International Inc 45 High Point Avenue, #2 Portsmouth, RI 02871, USA

USA - California

Ronstan International Inc. 2033 Clement Ave, Building 31, Suite 223 Alameda, CA 94501, USA

USA - Florida

Ronstan International Inc 1421 Bay Street SE, Suite 3 Saint Petersburg, FL 33701, USA

> +1 (401) 293 0539 +1 (401) 293 0538